

We are in the Business of
Solving Problems!

The MGS Group



MGS
Manufacturing
HALL
Industries



ST 800 SINGLE TWIST MACHINE

The Single Twist ST800 machine utilizes an aerodynamic rotor, rotating around a traversing take up drum mounted on a cantilever shaft.

This machine is ideally suited to manufacture the high specification data / communication cables required by today's cable manufacturers.

With the emphasis on aerodynamic components such as the rotor and the final guide pulley, the vibration and noise levels are kept to a minimum.

Typical Range Of Products

Cabled Insulated LAN - UTP/STP/SSTP
CAT 5/5e/6/7

With / Without Separator
Control cables, Signal cables, Telephone Cable

Max Cable Diameter 3/4" (20 mm)

General Specifications

Max Rated Rotor Speed 1000 rpm

Take UP Reel Size 30" (800 mm)

Recommended bore diameter 5" (127mm)

Take Up Tension Range 2lbs – 40lbs (10-200 N)
Typical product tension for 22lbs – 34lbs (100-150 N)

Maximum Linear Speed 650 ft/min (200 m/min) or at an agreed speed
with the customer

Lay Range 2" - 8" (50-200 mm)

Direction of Lay Left or Right (S or Z)

Main Motor (Rotor) AC

Take-Up Motor AC



Reel Motor AC

PLC Allen Bradley

HMI 12" AB Optix Touchscreen/pushbuttons

Drives AC

Approximate Weight 18,000 pounds – 8,000 kg

Dimensions (Unpacked) Length 15' 4" – 4,670mm
Width 7' 5" – 2,262mm
Height 6' 7" – 2,010mm

Braking – Pneumatic Disc brakes are provided on both the rotor and the drum drive. Plus dynamic braking from the AC Drives.

Machine Design - Rotors, machine frame and loading system are all integrated in one unit. The safety / sound enclosure and integrated control cabinet can be isolated from mainframe.

Machine Frame - Stress relieved torsion-free steel fabrication.

Rotor - Statically and dynamically balanced with 2 x 9 1/2" dia Guide Pulleys. Final guide pulley is cantilever mounted and gives minimal windage effects by using low profile spoked aluminum design.

In order to minimize noise and vibration the rotor has been designed as a cone, and encapsulates the two 9 1/2" (240 mm) pulleys. The exit pulley has been designed to minimize windage effects by using a low area profile

Rotor Lubrication - Grease lubrication. Central grease lubrication to all major bearings is provided via a manifold positioned at the rear of the machine.

Traverse - The traversing carriage assembly is on precision ball slides. The traverse pitch and end stops can be adjusted via the HMI Panel.

Rotating Capstan - Used in conjunction with the ST800, where the need for accurate lay lengths are required. The main pulling force for the cable comes from the RC800 and not the take-up reel.


Take Up Drum Drive and Winding Tension - By AC Motor and epicyclic gearbox. Adjustable from outside, constant tension as reel fills from barrel to flange.

Reel Loading And Unloading - Foundation free, powered loading platform.

Safety / Sound - Self-supporting construction.

Enclosure Machine starts running with closed door only. Door can only be opened if rotor is not in motion. Electrically locked during operation, operator door slides sideways, internal lighting, end access for service.

Rotating Capstan Model
RC-800

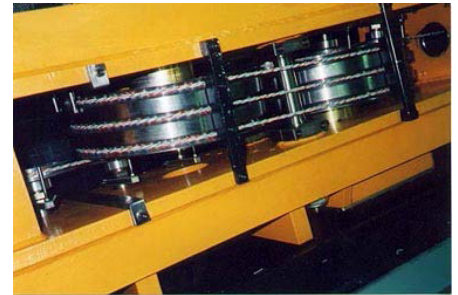

MGS Manufacturing

122 Otis Street
Rome, NY 13441 USA

Hall Industries

8C Commerce Drive
North Branford, CT 06471 USA

Northampton Machinery Co.

7 Deer Park Road
Northampton NN3 6RX England